

# NTS-pico3-ANT

## IEEE1588 Antenna Integrated Time Server


- All-in-One GNSS RCV & SERVER
- PTP IEEE1588 GrandMaster
- NTP/SNTP Server STRATUM-1
- White Rabbit High Accuracy\*
- Reference time from GNSS
- Built-in RF antenna
- 650ps Delay Surge Arrester\*
- GNSS Reacquisition < 1s
- GNSS Hot Start (TTFF) < 3s
- GNSS Warm Start (TTFF) <25s
- GNSS Cold Start (TTFF) <25s
- Holdover TCXO, MCXO\*, OCXO\*
- Ethernet 2x 1GbE (SFP\*, RJ45\*)
- Ethernet 100/10Mbps (RJ45)
- Device powered from PoE LAN1
- Hardware Time Stamping
- IEC61850 Smart Grids
- Power Profile IEEE C37.238
- Telecom ITU-T G.8275.1 and .2
- SyncE ITU-T G.8261.1
- HTTP, HTTPS, TELNET, SSH
- SYSLOG, SNMP (MIB-2)
- Best CYBER-SECURITY product

 ELPROMA


[www.elpromatime.com](http://www.elpromatime.com)

© 1992-2020

\* extra feature requiring additional hardware and software upgrade

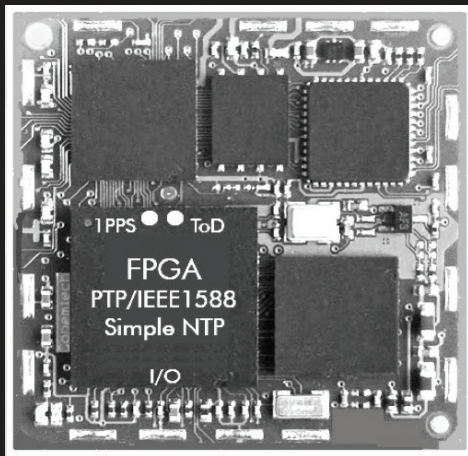

LAN2-3 FPGA supports hardware timestamping and PTP profiles

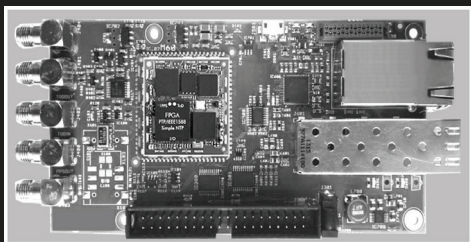

LAN2-3 are hosted by separate security board isolated from MAIN unit and using ANALOG (PPS+ToD) synchronization signals only.



The LAN1 is hosted on embedded ver. of well known NTS-pico3. The special embedded version of NTS-pico3 inside ANT version controls GNSS, MANAGEMENT, PoE and autonomous LAN2-3. The NTS-pico3-ANT product is all-in-one assembled inside dome bullet class industrial housing and it is powered PoE (LAN1).



NTS-pico3-ANT product view

**NTS-pico3-ANT** is advanced, external version of NTS-pico3. It is antenna integrated time server. It delivers UTC/TAI ref. time directly to network using NTP, PTP protocols. Reference time is supported from GNSS. Unit has ultra fast Time To First Fix start-up TTFF supported by SBAS systems. Standard product includes hardware timestamping. It supports profiles *Default, Power, Telecom, White Rabbit\** high accuracy\*.

It is equipped with 3x LANs (2x 1GbE SFP, RJ45 and 1x 100Mbps RJ45/PoE) supporting both IPv4 and IPv6. Product has natural air cooling and it can operate 24/7 powered by Ethernet PoE interface RJ45. The surge arrester for RJ45 shall be purchased separately.

A built-in GNSS satellite receiver includes TCXO oscillator for a short-time holdover. To increase holdover time the MCXO\* and OCXO\* oscillators are available on request.

### New 21st century paradigm of Industry 4.0 cyber-security

Why hackers cannot succeed? The typical PTP network appliance has single FPGA or ASIC sharing PTPstack to all network LAN interfaces. The NTS-pico3-ANT uses private CPU for management port LAN1, 100% separating it (no TCP/IP) from LAN2 & 3 using own FPGA. This ensures hackers cannot break into production network of smart-grids or telecom taking any control over it. Hackers cannot move between LAN1 and LAN2-3. The future\* version of product will be equipped with anti-jamming\*/spoofing\* alarm.

### GNSS Synchronization w/ SBAS (EGNOS, WAAS)

- Receiver 32-channel accuracy RMS better than 15 ns
- Acquisition: -143dBm; reacquisition: -160dBm; tracking: -160dBm
- GPS with AGPS L1 (1575,42MHz)
- GLONASS L1 (1598,06-1605,38MHz)
- GALILEO\* E1 (1575,42MHz)
- BEIDOU\* L1 (1561,09-1575,42MHz)



### Surge Arrester (optional)

- Arrester Delay Time 630ps (picoseconds)
- UL Certificate E311081
- Standard IEC61643-21, 61024-1
- Max current 10kA
- Response (switch) time < 1ns (nanoseconds)
- Wire-2-PE 1kA according IEC61643-21

### Network Interfaces IEEE802.3

Network Interface Speed 100/10Mbps  
 Connector Type RJ45  
 Timestamping HARDWARE  
 Precision Time Protocol IEEE1588:2008 PTPd  
 IEEE1588:2019 PTPd\*  
 PTP mode MASTER  
 SLAVE  
 PTP CLOCK mode OC  
 PTP IEEE1588 Profiles Default  
 TELECOM NO  
 NO  
 NO  
 POWER IEEE C37.238 NO  
 IEC61850-9-3 NO  
 MAX PTP #SLAVES UNLIMITED  
 Synchronous Ethernet ITU-T G.8261.1 NO

### LAN1 (MANAGEMENT)

100/10Mbps  
 RJ45  
 HARDWARE  
 PTPd  
 PTPd\*  
 MASTER  
 SLAVE  
 OC  
 Default  
 NO  
 NO  
 NO  
 NO  
 UNLIMITED  
 NO

### LAN2

1GbE  
 SFP  
 HARDWARE  
 PTP ASIC  
 PTP FPGA\*  
 MASTER  
 SLAVE  
 OC, BC  
 Default  
 ITU-T G.8265.1  
 ITU-T G.8275.1  
 ITU-T G.8275.2  
 IEEE C37.238  
 (via C37.238)  
 32/128\*/256\*  
 SyncE  
 Master & Slave

### LAN3


1GbE  
 RJ45  
 HARDWARE  
 PTP ASIC  
 PTP FPGA\*  
 MASTER  
 SLAVE  
 OC, BC  
 Default  
 ITU-T G.8265.1  
 ITU-T G.8275.1  
 ITU-T G.8275.2  
 IEEE C37.238  
 (via C37.238)  
 32/128\*/256\*  
 SyncE  
 Master & Slave

### Management •SNMP •MIB 2 •RADIUS •HTTP •HTTPS •SSH •TELNET\* •NTPQ

### Mechanical/environmental

Size: 13 x 13 x 30mm  
 Weight netto NTS-pico3-ANT (only): 1.2kg  
 Weight brutto BOX (NTS-pico3 & Antenna): 6.0kg

Operating temperature: -40°C to +70°C  
 Storage temperature: -40°C to +80°C  
 Humidity: up to 99%  
 IP67 water resistant  
 MTBF 391000 hours  
 Manufactured in EU (Poland)  
 Under audited CE & ISO9001 control  
 e-mail: info@elpromatime.com

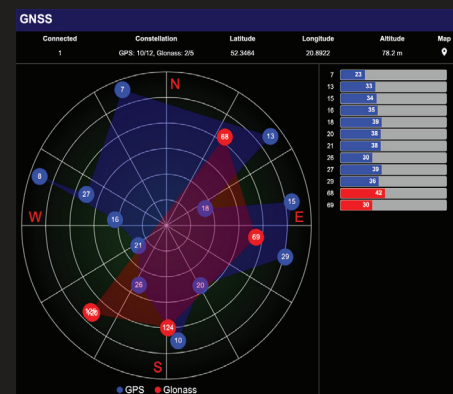

View of GNSS radar built-in management

\* extra feature requiring additional hardware upgrade



www.elpromatime.com